


BRK15M Rev C Datasheet

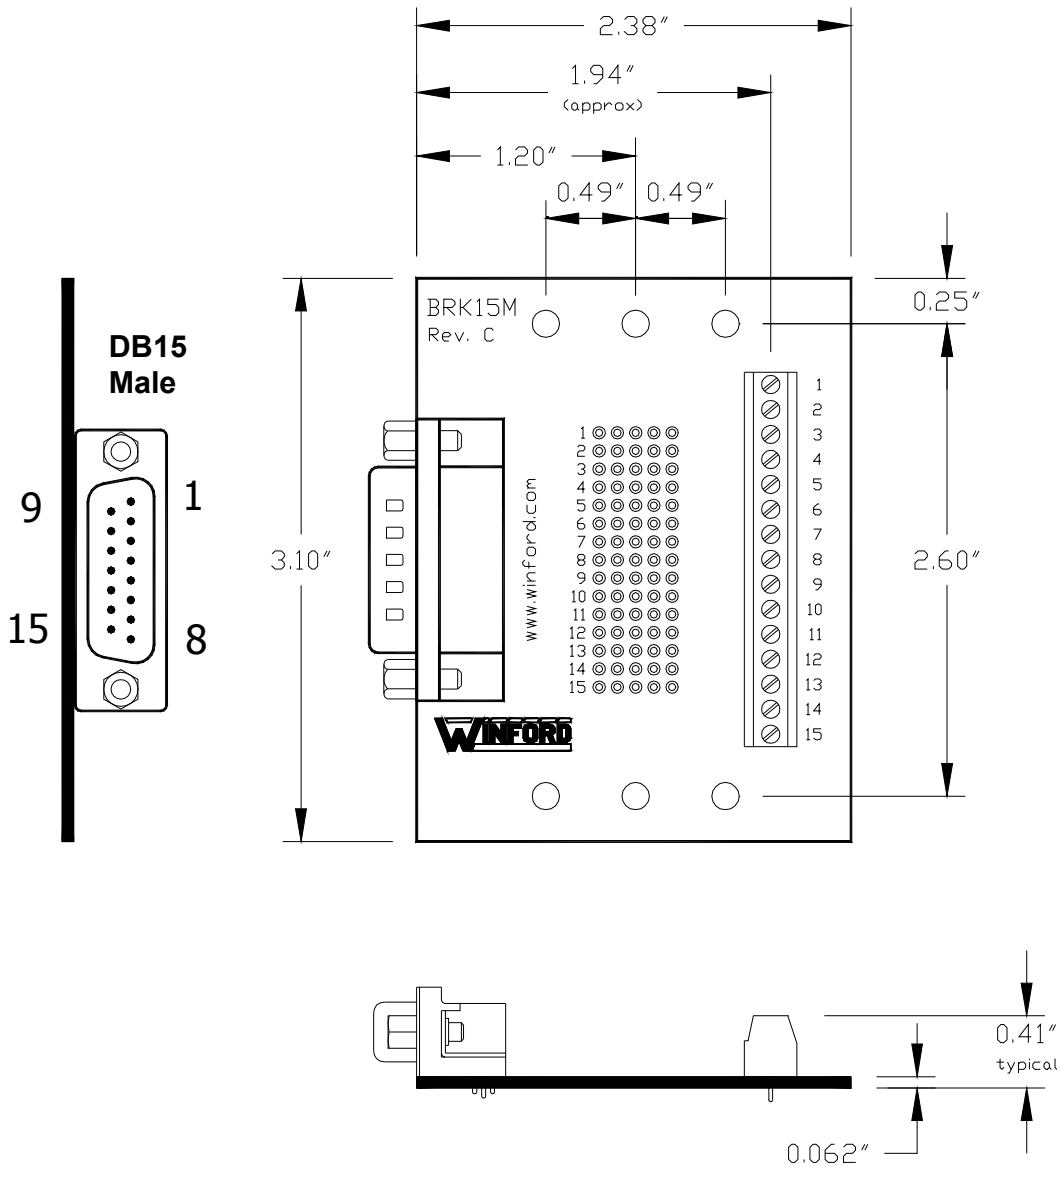


- MOUNTING HOLE, 0.15" DIA
- ⊙ SOLDER PAD W/ 0.05" DIA HOLE
- ⊘ SCREW TERMINAL

BRK15M Rev C Specifications

| | |
|---------------------|--------------------------------------|
| Ambient Temperature | -20°C to 85°C |
| Ambient Humidity | 10% to 90% RH, non-condensing |
| Voltage | 200V maximum between any two signals |
| Continuous Current | 2.25A maximum on any signal |
| Screw Terminal Size | Accepts 16 - 26 AWG wire |

Part Number Ordering Information



1. Connector Positions


- **9** DB9
- **15** DB15 (two-row)
- **15HD** DB15 High Density (three-row)
- **25** DB25
- **37** DB37

2. Connector Gender

- **M** Male (Plug)
- **F** Female (Socket)


3. Connector Style

- **R** Right Angle
- **S** Straight (Vertical)

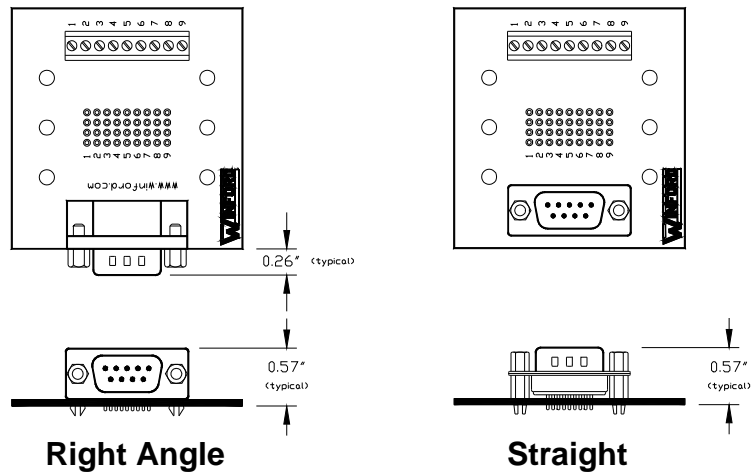

4. Mounting Option

- **FT** Rubber Feet on bottom side of PCB
- **DIN** DIN Rail Mounting Clips

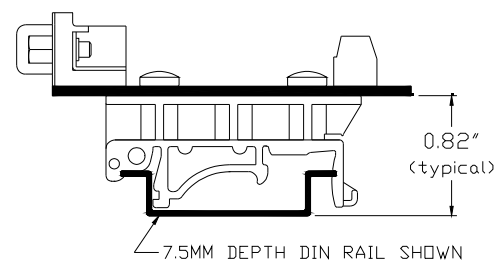

DIN Clip Mounting Option

BRK15M Stocked Part Numbers

The following part numbers represent standard options and are stocked:

- BRK15M-R-FT
- BRK15M-R-DIN
- BRK15M-S-FT
- BRK15M-S-DIN

For parts other than BRK15M-*, please see the other datasheets for a list of stocked part numbers.

Notice

Winford Engineering, LLC does not authorize any of its products for use in military, medical or other life-critical systems and/or devices. Life-critical devices/systems include devices or systems which, a) are intended for surgical implantation into the body, or b) support or sustain life and whose failure to perform can be reasonably expected to result in injury. Winford Engineering, LLC products are not designed with the components required, and are not subject to the testing required to ensure a level of reliability suitable for the treatment and diagnosis of people. Winford Engineering, LLC shall not be held responsible or liable for damages or injury that occur as a result of the use of this product.